

KNX MultiTouch Pro

User defined icons

- For screen type 1 and 2 functions
 - 1 user defined icon
- For screen type 1-4 functions (extended)
 - 10 user defined icons
- For internal and external scenes
 - 3 user defined icons

Use Chinese Symbols for screen name No Yes

Screen name (1-13 characters)

Which screen type do you use?

Function

Type of switching function

Which function symbol do you use?

- Table/standard lamp
- Ceiling lamp
- Spot
- Bulb
- Bulb with radiance
- Start
- Brightness
- User defined 1 ✓

Function

Which symbol type do you use? Symbol with background Symbol with indication ring

Which function symbol do you use?

Number of objects

Type of object A

How the status indication is triggered?

- Next Track
- Prev Track
- Temperature Mode Comfort
- Temperature Mode Night
- Temperature Mode Eco
- Temperature Mode Heating
- Temperature Mode Cooling
- User defined 1
- User defined 2
- User defined 3
- User defined 4
- User defined 5
- User defined 6
- User defined 7
- User defined 8
- User defined 9
- User defined 10 ✓

Use Chinese Symbols for screen name No Yes

Screen name (1-13 characters)

Which screen type do you use?

Function

Which design do you use? Button with text Button with symbol

Position of buttons

Scene 1

Which function symbol do you use?

Value of scene address (0-63)

-
- 2
- 3
- 4
- 5
- 6
- Presence simulation
- Sleeping
- Watching TV
- Reading
- Sitting
- Cleaning
- Service call
- Do not disturb
- First aid
- User defined 1
- User defined 2
- User defined 3 ✓

KNX MultiTouch Pro

User defined icons - requirements

- To add user defined icons, follow these requirements

- Bitmap file (bmp)
- Size of the pictures
 - MTN6215-0310 System M:
Small: **25 x 25 pixels**, with 8 bit (= 256) colours
Large: **50 x 50 pixels**, with 8 bit (= 256) colours
 - MTN6215-5910 System Design
Small: **35 x 35 pixels**, with 8 bit (= 256) colours
Large: **62 x 62 pixels**, with 8 bit (= 256) colours

- Name of the files for 1 and 2 functions


- USR01OFF.BMP, USR01ON.BMP,

- Name of files for 1-4 functions

- USR01OFF.BMP, USR01ON.BMP, USR01ON2.BMP, ...

- Name of files for scenes


- USR01.BMP, ...

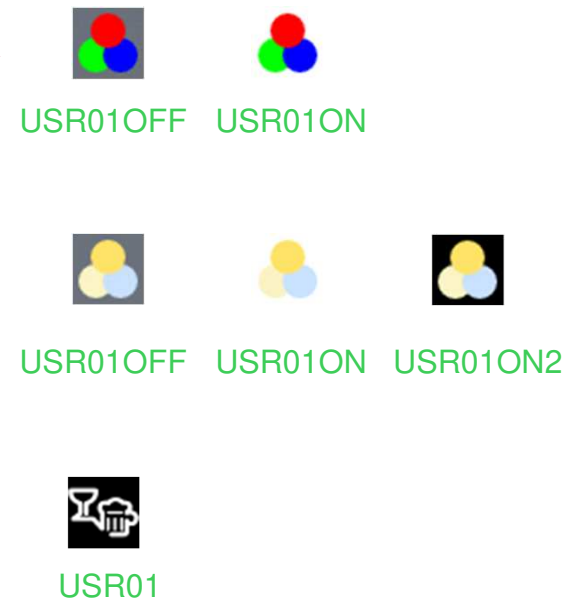

KNX MultiTouch Pro

User defined icons - requirements

- Disconnect the MultiTouch from KNX !
- Connect the MultiTouch Pro to a PC with a USB cable (micro-B plug)
- Use Windows explorer to transfer the files
- Copy files to correct folders

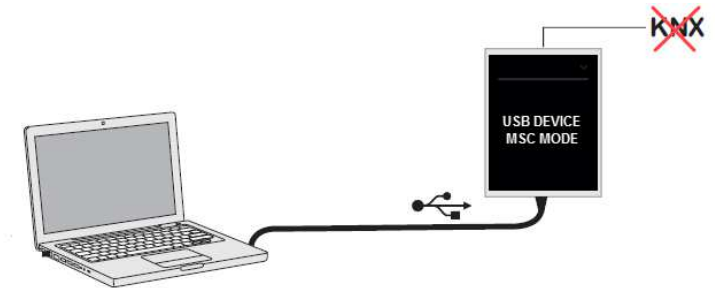

1 and 2 functions design
(Express settings)

1 to 4 functions design
(Extended settings)

Scene Module

