


Network Management Card 1 and 2

Configuring Clearing Events (v3.X.X, 5.X.X, 6.X.X)


Purpose: This document is intended to provide a visual step by step guide in reference to knowledgebase article ID FA156104 – configuring clearing event notifications, such as UPS: Self Test Passed.

Configuring Clearing Events (v3.X.X, 5.X.X)

1. Log into your Network Management Card via a web browser. Enter your username and password and log on.

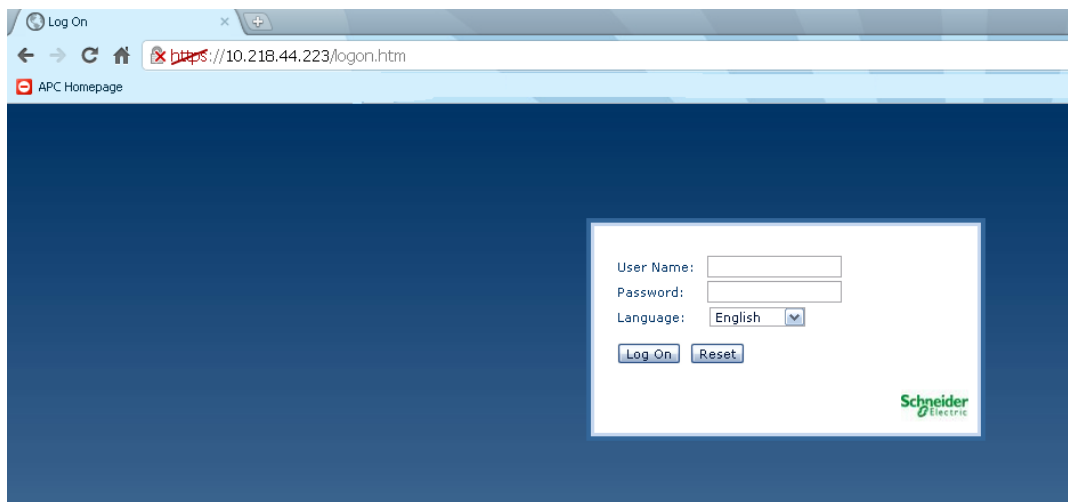


2. Click on the Administration Tab->Notification->By Event. Find the event you are looking for under the appropriate category. For this example, we will choose “UPS: Self test failed” which is under “Diagnostics.”

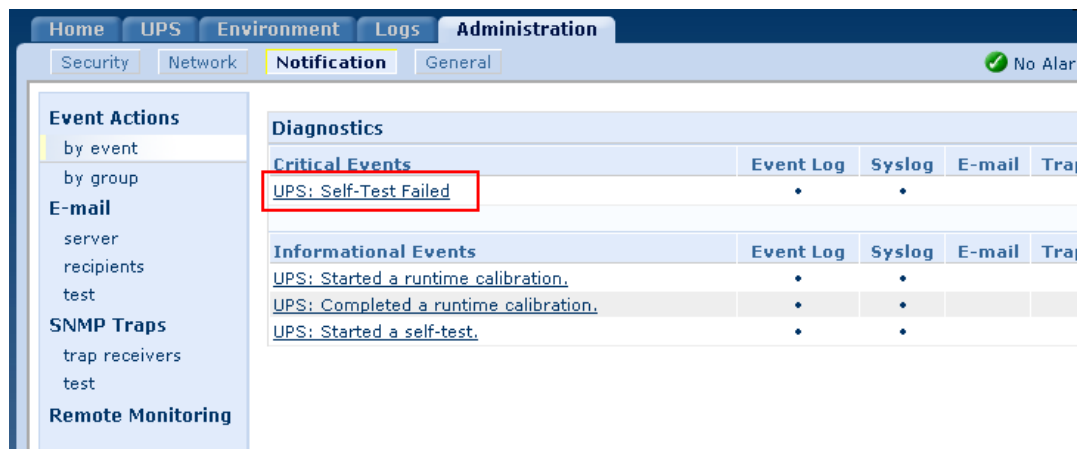


3. Click on the particular event and you will see a similar screen as seen below.

The screenshot shows the 'UPS: Self-Test Failed [0x0106]' configuration page. The left sidebar contains navigation links: Event Actions (by event, by group), E-mail (server, recipients, test), SNMP Traps (trap receivers, test), and Remote Monitoring. The main content area has tabs for Security, Network, Notification (selected), and General. A 'No Alarms' status is shown in the top right. The event details include Category: Power Events | Diagnostics and Clearing Event: UPS: Passed a self-test, [0x0105]. The Log section has checkboxes for Event Log and Syslog, both checked. Below are sections for E-mail and Trap configurations, each with a table header (Delay, Repeat, Interval, Duration) and a message 'There are no recipients configured.' and 'There are no receivers configured.' respectively. At the bottom are buttons for Apply, Cancel, and Restore Defaults.

4. In the address bar at the top your web browser, you will notice that there is a unique code that corresponds to the event just selected. In this case, the event "UPS: Self Test Failed" is denoted by the code 0x0106. Please note that each individual event within the Network Management Card has its own unique hex event code.

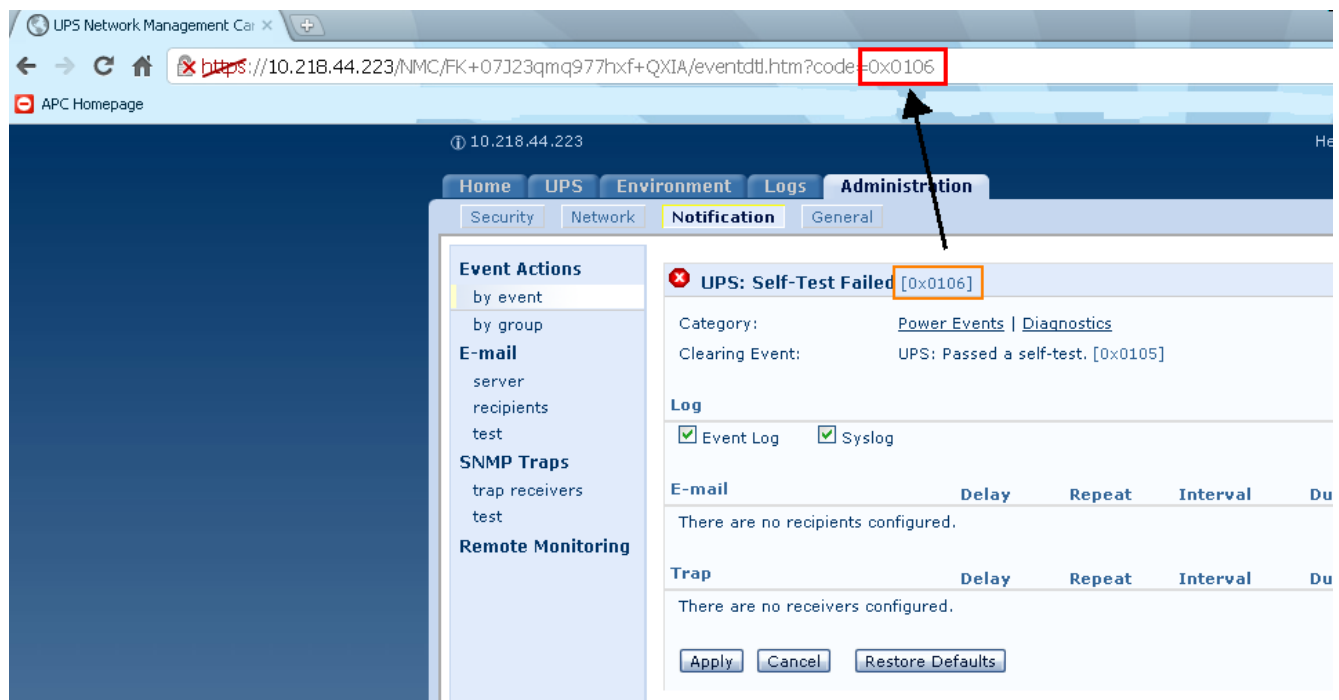


5. The clearing event for “UPS: Self Test Passed,” as seen in the screenshot above, is 0x0105. If you’d like to disable this event specifically (since it’s not listed alone on the event notification list), you can change the URL in the address bar to the appropriate code 0x0105.

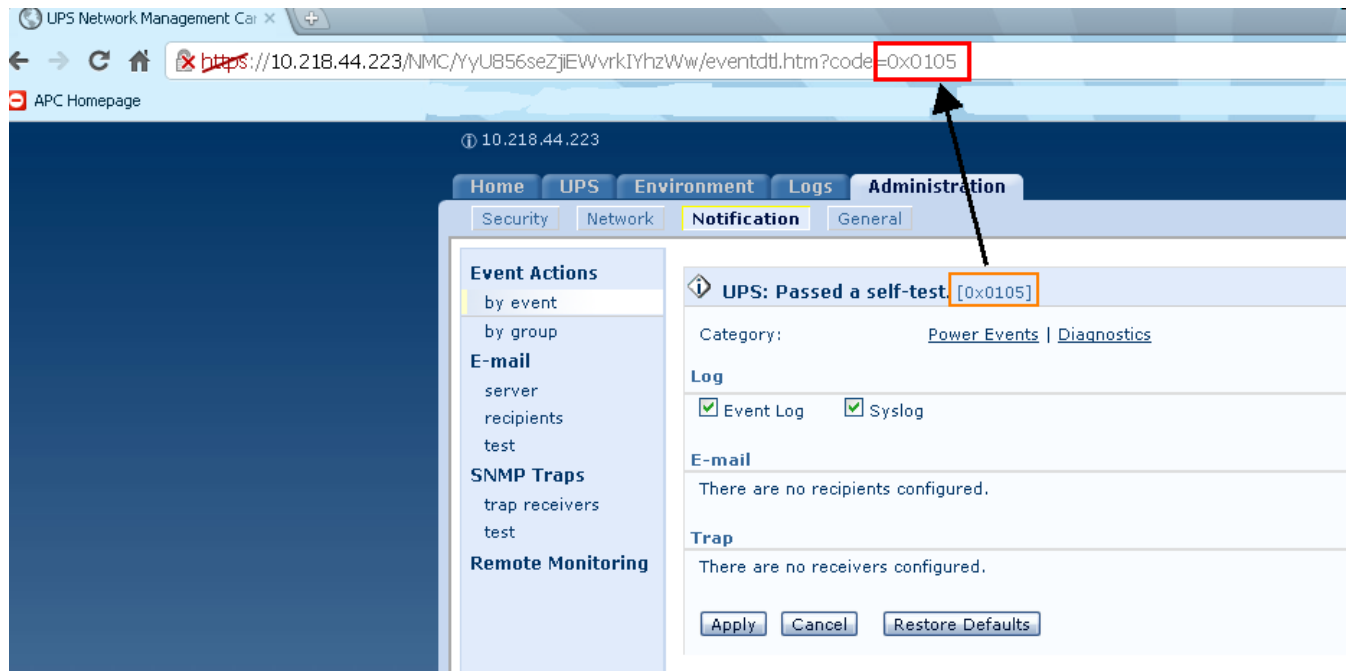


From this screen, you can de-select any notification (email, syslog, event log, or SNMP trap) you’d like by using the unique hex code, no matter if the event is listed in the web UI notification list or not. As mentioned in knowledgebase article FA156104, make note of the consequences of using this method for certain events, such as “UPS: Self test passed.”

Configuring Clearing Events (v6.X.X)

1. Log into your Network Management Card via a web browser. Enter your username and password and log on.

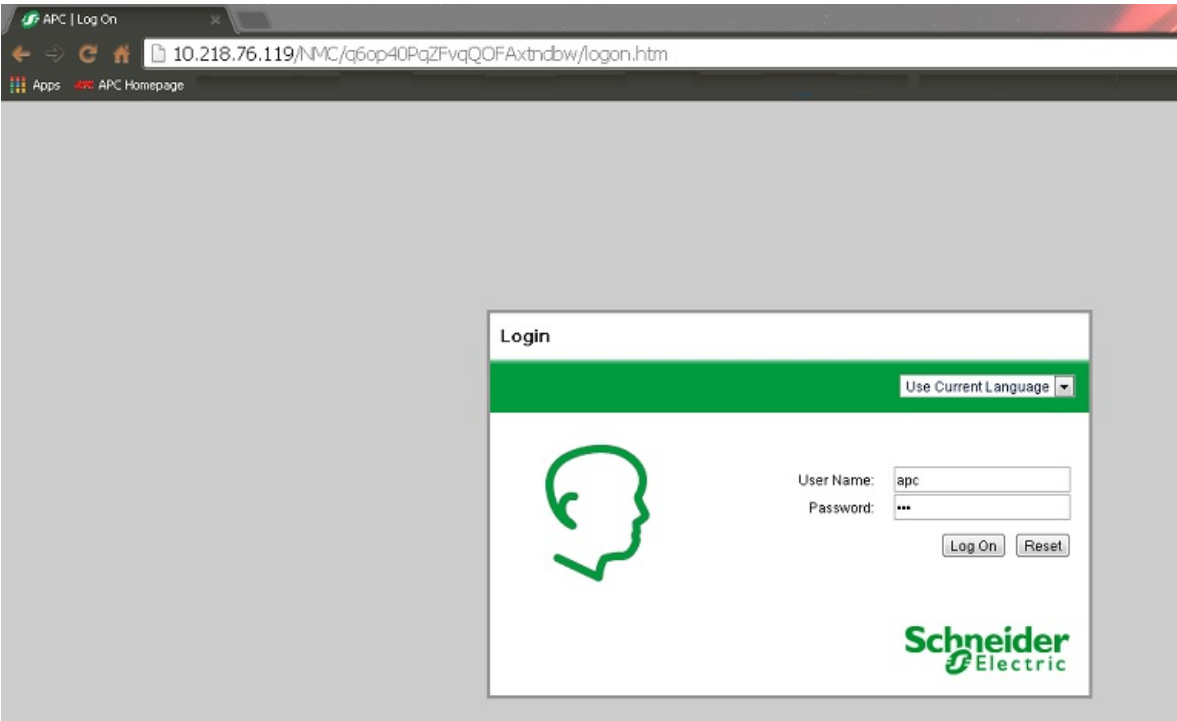

2. Click on the Configuration menu->Notification->Event Actions->By Event. Find the event you are looking for under the appropriate category. For this example, we will choose "UPS: Self test failed" which is under "Diagnostics."

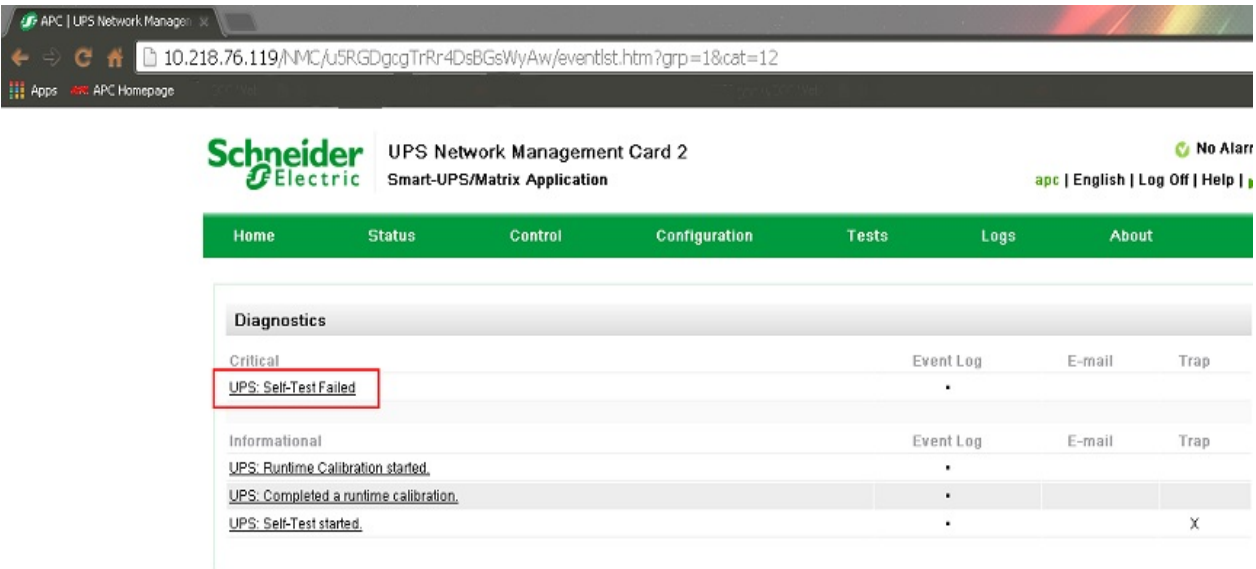

- Click on the particular event and you will see a similar screen as seen below.

Schneider Electric UPS Network Management Card 2
Smart-UPS/Matrix Application

apc | English | Log Off | Help

Home Status Control Configuration Tests Logs About

UPS: Self-Test Failed [0x0106]

Category: [Power Events | Diagnostics](#)
Clearing Event: UPS: Self-Test passed. [0x0106]

Log
☒ Event Log

E-mail

	Delay	Repeat	Interval	Duration
<input checked="" type="checkbox"/> JaneDoe@apc.com	Disabled	yes	2 minutes	until cleared

Trap

	Delay	Repeat	Interval	Duration
There are no receivers configured.				

Apply Cancel Restore Defaults

- In the address bar at the top your web browser, you will notice that there is a unique code that corresponds to the event just selected. In this case, the event “UPS: Self Test Failed” is denoted by the code 0x0106. Please note that each individual event within the Network Management Card has its own unique hex event code.

APC | UPS Network Management Card 2

10.218.76.119/NMC/TZ19U7HRCHZaJ5tjvJv8LA/eventdtl.htm?code=0x0106

Apps APC Homepage

Schneider Electric UPS Network Management Card 2
Smart-UPS/Matrix Application

Home Status Control Configuration Tests

UPS: Self-Test Failed [0x0106]

Category: [Power Events | Diagnostics](#)
Clearing Event: UPS: Self-Test passed. [0x0106]

Log
☒ Event Log

E-mail


	Delay	Repeat	Interval	Duration
<input checked="" type="checkbox"/> JaneDoe@apc.com	Disabled	yes	2 minutes	until cleared

Trap

	Delay	Repeat	Interval	Duration
There are no receivers configured.				

Apply Cancel Restore Defaults

5. The clearing event for “UPS: Self Test Passed,” as seen in the screenshot above, is 0x0105. If you’d like to disable this event specifically (since it’s not listed alone on the event notification list), you can change the URL in the address bar to the appropriate code 0x0105 and disable the particular notifications for it.

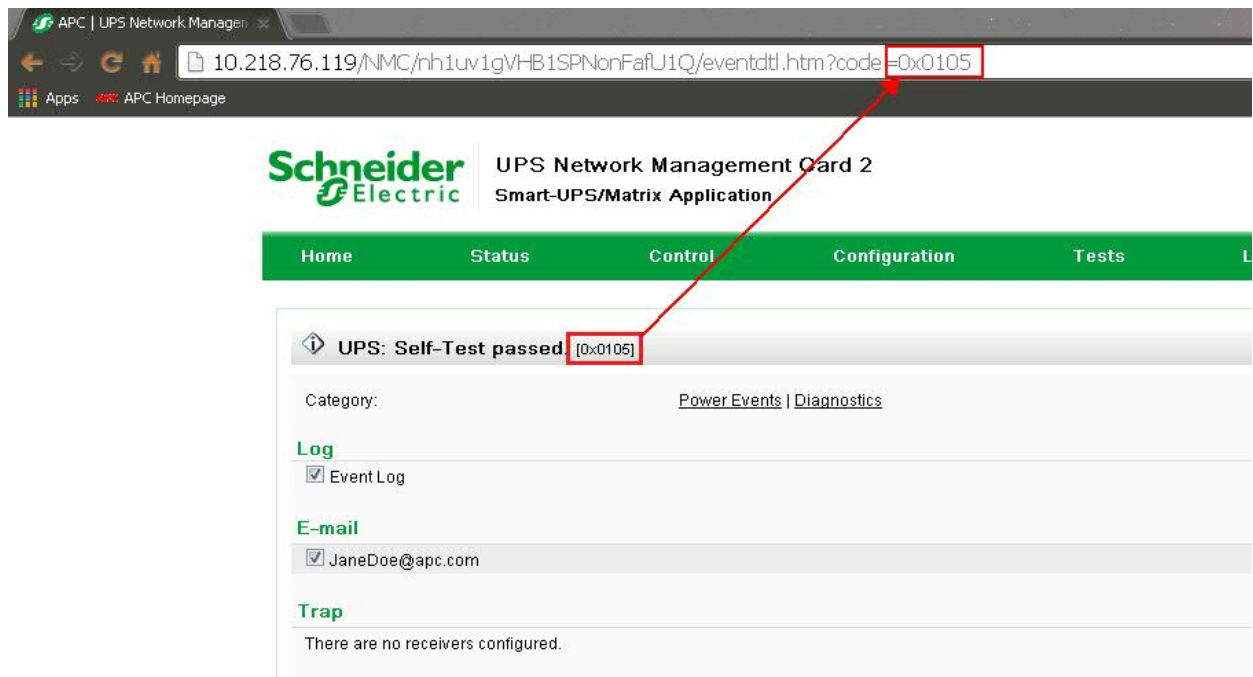

From this screen, you can de-select any notification (email, syslog, event log, or SNMP trap) you’d like by using the unique hex code, no matter if the event is listed in the web UI notification list or not. As mentioned in knowledgebase article FA156104, make note of the consequences of using this method for certain events, such as “UPS: Self test passed.”